



PROPRIETARY STATEMENT: THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO AVEOX, INC. IT MAY NOT BE DUPLICATED IN WHOLE OR IN PART, DISCLOSED TO UNAUTHORIZED PERSONS, OR USED IN THE MANUFACTURE OF PARTS, ASSEMBLIES, OR FOR MANUFACTURING PROCESSES DEFINED HEREIN, WITHOUT PRIOR WRITTEN PERMISSION FROM AVEOX, INC.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE PER ECO # 7201	4/19/2018	SEE ECO APPROVAL

NOTES: (UNLESS OTHERWISE SPECIFIED)


1.
- STATOR LEAD WIRES PER M22759
PHASE A: RED
PHASE B: WHITE
PHASE C: BLACK

2.

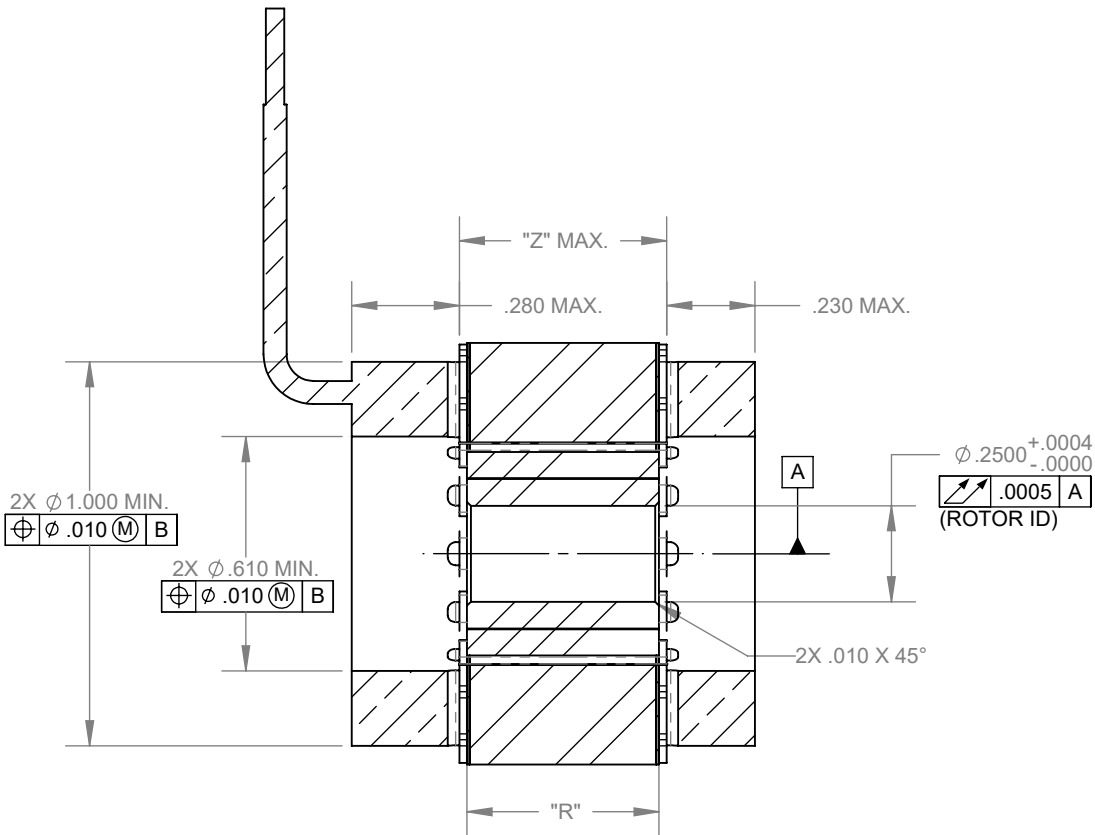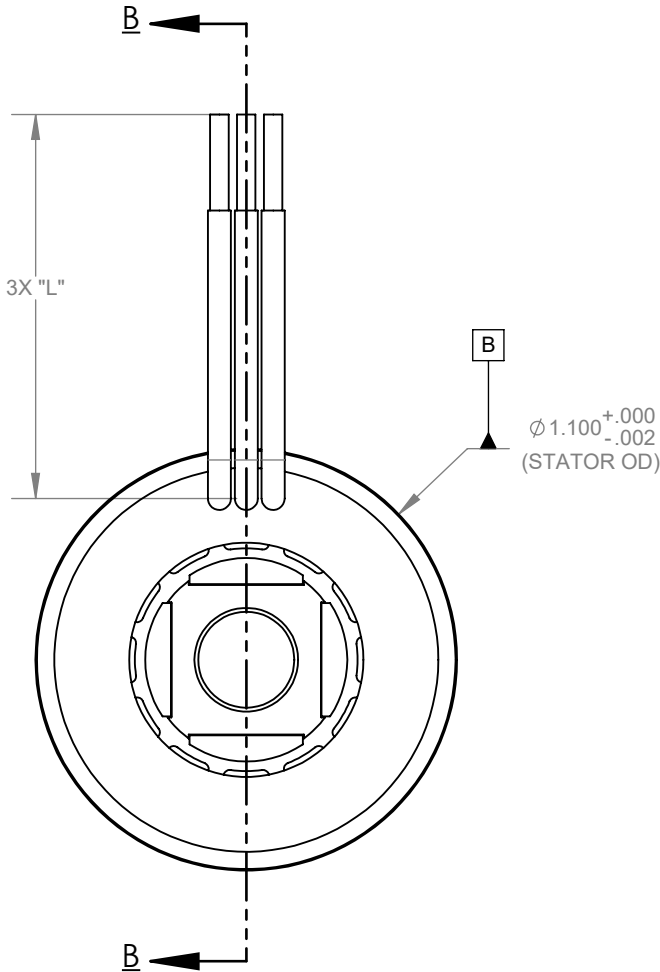

SECTION B-B

PART NO.	DESCRIPTION	"Z" MAX.	LEAD WIRE GAGE	"L" ± .500	"R" ± .005
6100248-01	O&M DWG, 1105/6 STD ROTOR AND STATOR SET	.570	18	12	0.500
6100248-02	O&M DWG, 1105/12 STD ROTOR AND STATOR SET	.570	18	12	0.500
6100248-03	O&M DWG, 1110/3 STD ROTOR AND STATOR SET	1.070	16	12	1.000
6100248-04	O&M DWG, 1110/6 STD ROTOR AND STATOR SET	1.070	18	12	1.000
6100248-05	O&M DWG, 1115/2 STD ROTOR AND STATOR SET	1.570	14	12	1.500
6100248-06	O&M DWG, 1115/4 STD ROTOR AND STATOR SET	1.570	18	12	1.500

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES			CONTRACT No.		 AVEOX, INC. 2265A Ward Avenue Simi Valley, CA. 93065 805-915-0200 (Phone) 805-915-0201 (FAX)			
TOLERANCE ON ANGLE: ±0.5° ON DECIMALS: INCH MILLIMETER SURFACE(µin.) .XX ±.01 .X ±.5mm 63/ .XXX ±.005 .XX ±.1mm REMOVE ALL BURRS BRAKE CORNERS R.005/.010. INTERPRET DRAWING PER ASME Y14.5-2009 DO NOT SCALE DRAWING DIMENSIONS APPLY AFTER SURFACE FINISH			APPROVALS					
THIRD ANGLE PROJECTION 			DRAWN E. NG		4/19/18		TITLE: O&M DWG, 11XX/Y STD ROTOR AND STATOR SET, TABULATED	
			CHECK					
			ENGINEER					
			SCALE: NONE		CALC. WEIGHT:		SHEET 1 OF 1	
					SIZE B		CAGE CODE 1C2S2	
					DWG No. 6100248-XX		REV A	