



PROPRIETARY STATEMENT: THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO AVEOX, INC. IT MAY NOT BE DUPLICATED IN WHOLE OR IN PART, DISCLOSED TO UNAUTHORIZED PERSONS, OR USED IN THE MANUFACTURE OF PARTS, ASSEMBLIES, OR FOR MANUFACTURING PROCESSES DEFINED HEREIN, WITHOUT PRIOR WRITTEN PERMISSION FROM AVEOX, INC.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE PER ECO # 7203	4/19/2018	SEE ECO APPROVAL

NOTES: (UNLESS OTHERWISE SPECIFIED)

1.
- STATOR LEAD WIRES PER M22759
PHASE A: RED
PHASE B: WHITE
PHASE C: BLACK

2.

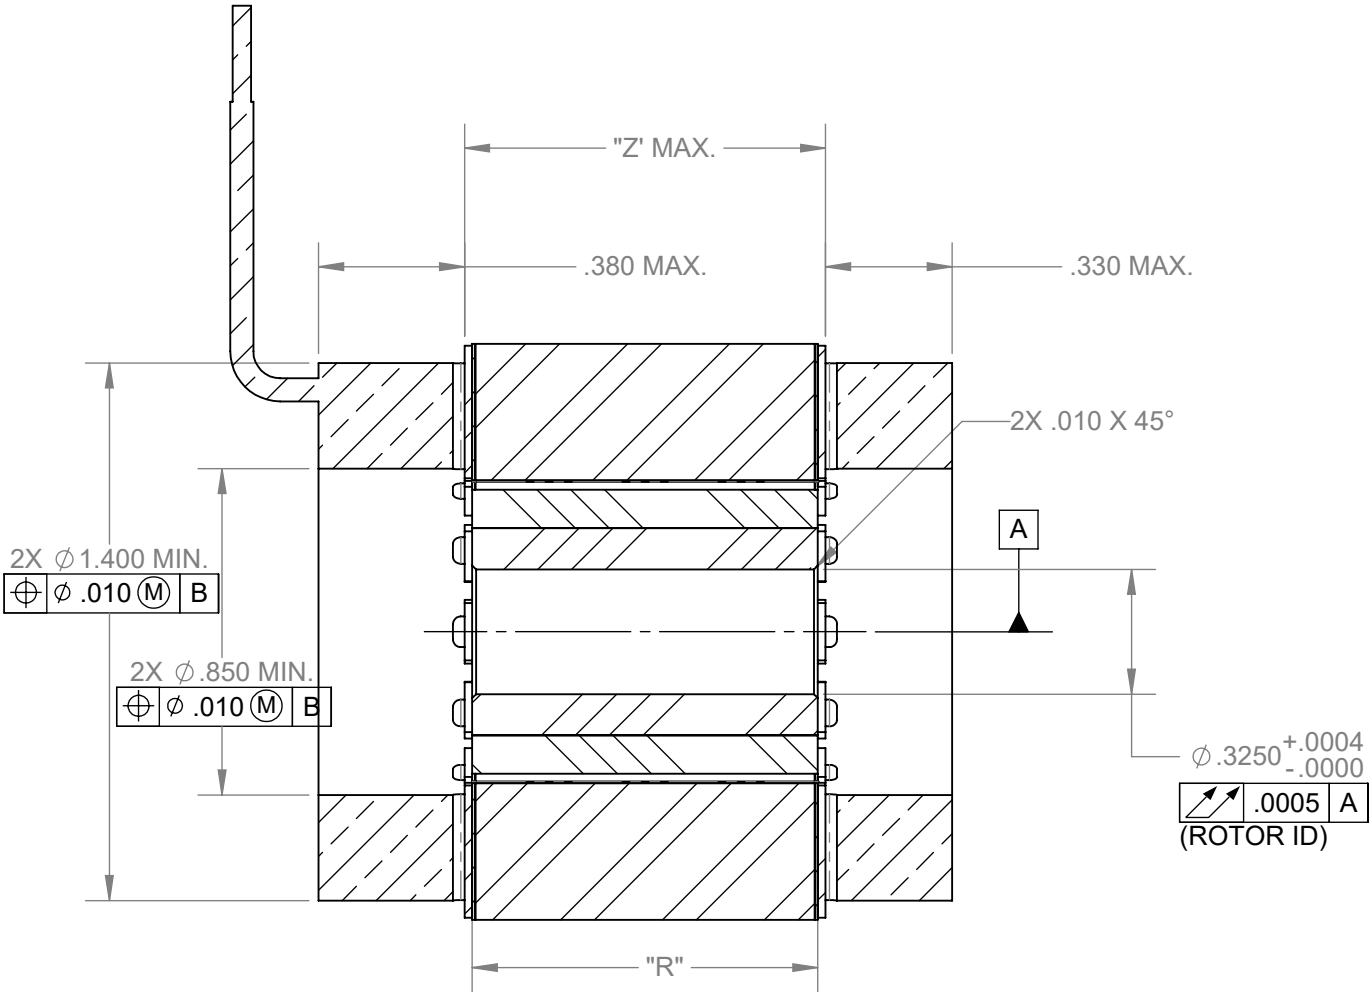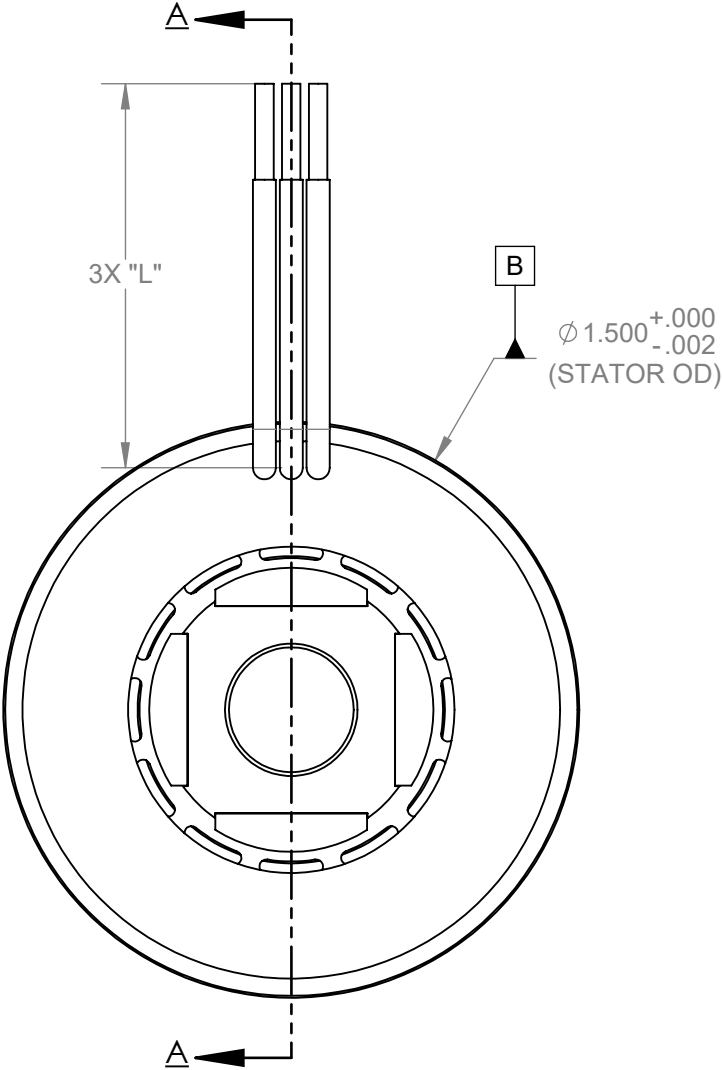

SECTION A-A

PART NO.	DESCRIPTION	"Z" MAX.	LEAD WIRE GAGE	"L" ±.500	"R" ±.005
6100250-01	O&M DWG, 1509/4 STD ROTOR AND STATOR SET	.970	16	12	0.900
6100250-02	O&M DWG, 1509/8 STD ROTOR AND STATOR SET	.970	16	12	0.900
6100250-03	O&M DWG, 1512/3 STD ROTOR AND STATOR SET	1.270	14	12	1.200
6100250-04	O&M DWG, 1512/6 STD ROTOR AND STATOR SET	1.270	16	12	1.200
6100250-05	O&M DWG, 1518/2 STD ROTOR AND STATOR SET	1.870	14	12	1.800
6100250-06	O&M DWG, 1518/4 STD ROTOR AND STATOR SET	1.870	16	12	1.800

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES			CONTRACT No.		AVEOX, INC. 2265A Ward Avenue Simi Valley, CA. 93065 805-915-0200 (Phone) 805-915-0201 (FAX)	
TOLERANCE ON ANGLE: ±0.5° ON DECIMALS: INCH MILLIMETER SURFACE(μin.) .XX ±.01 .X ±.5mm 63/ .XXX ±.005 .XX ±.1mm REMOVE ALL BURRS BRAKE CORNERS R.005/.010. INTERPRET DRAWING PER ASME Y14.5-2009 DO NOT SCALE DRAWING DIMENSIONS APPLY AFTER SURFACE FINISH			APPROVALS		DATE	
THIRD ANGLE PROJECTION			DRAWN		4/19/18	
			CHECK			
			ENGINEER			
			SIZE		CAGE CODE	
			B		1C2S2	
			DWG No.		6100250-XX	
			SCALE: NONE		SHEET 1 OF 1	