
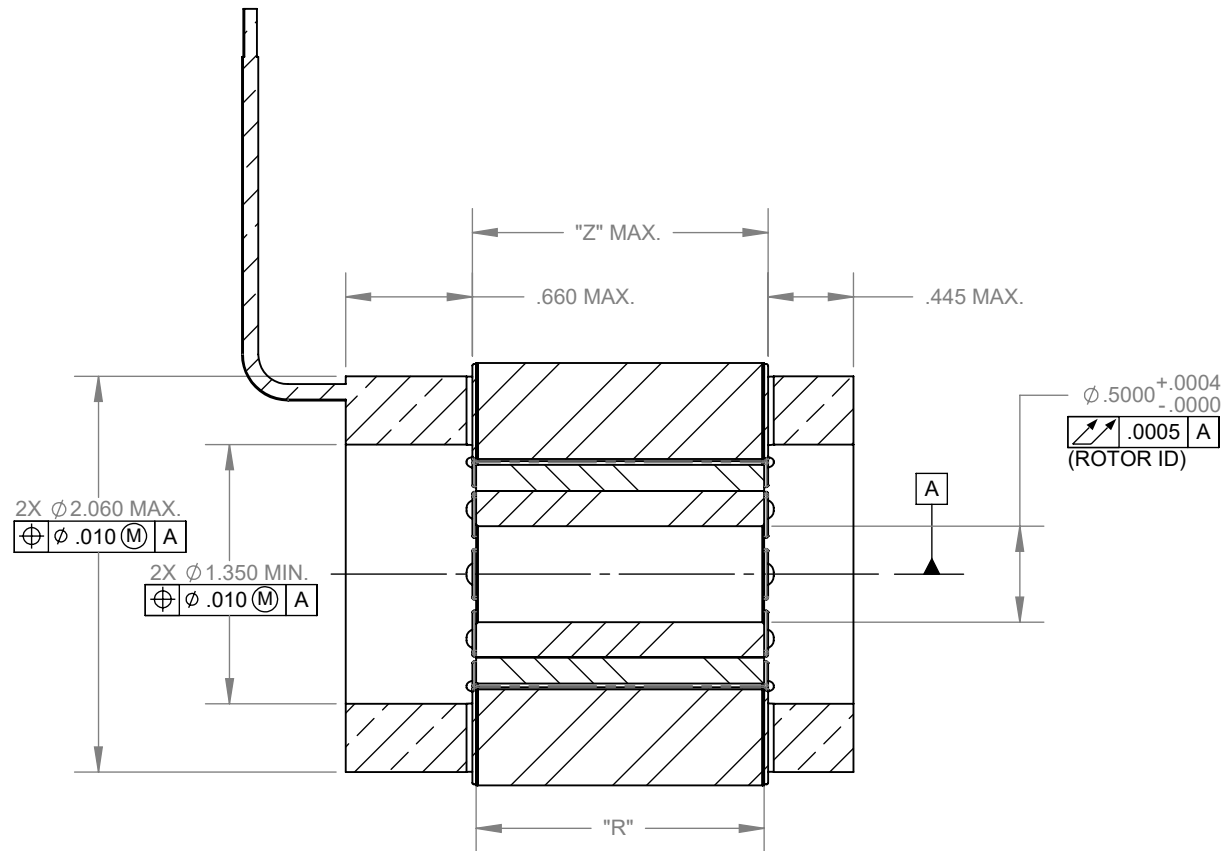


PROPRIETARY STATEMENT: THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO AVEOX, INC. IT MAY NOT BE DUPLICATED IN WHOLE OR IN PART, DISCLOSED TO UNAUTHORIZED PERSONS, OR USED IN THE MANUFACTURE OF PARTS, ASSEMBLIES, OR FOR MANUFACTURING PROCESSES DEFINED HEREIN, WITHOUT PRIOR WRITTEN PERMISSION FROM AVEOX, INC.


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. STATOR LEAD WIRES PER M22759
PHASE A: RED
PHASE B: WHITE
PHASE C: BLACK
2. SEE TABLE BLOW FOR CONFIGURATION

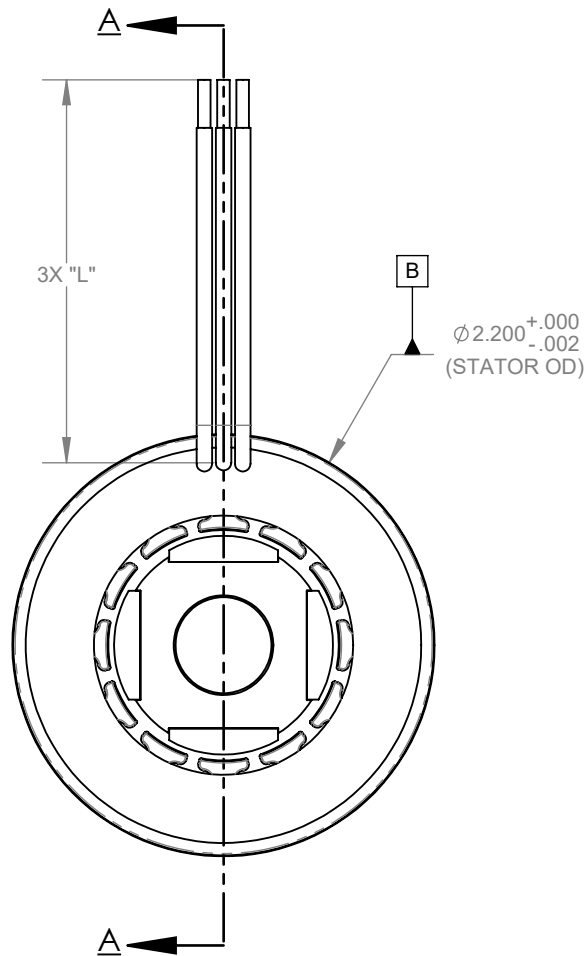

SECTION A-A
SCALE 1 : 1

PART NO.	DESCRIPTION	"Z" MAX.	LEAD WIRE GAGE	"L" ± .500	"R" ± .005
6100252-01	O&M DWG, 2215/8 STD ROTOR AND STATOR SET	1.570	14	12	1.500
6100252-02	O&M DWG, 2215/21 STD ROTOR AND STATOR SET	1.570	18	12	1.500
6100252-03	O&M DWG, 2220/6 STD ROTOR AND STATOR SET	2.070	14	12	2.000
6100252-04	O&M DWG, 2220/16 STD ROTOR AND STATOR SET	2.070	18	12	2.000
6100252-05	O&M DWG, 2225/5 STD ROTOR AND STATOR SET	2.570	14	12	2.500
6100252-06	O&M DWG, 2225/13 STD ROTOR AND STATOR SET	2.570	18	12	2.500

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		CONTRACT No.		 AVEOX, INC. 2265A Ward Avenue Simi Valley, CA. 93065 805-915-0200 (Phone) 805-915-0201 (FAX)	
TOLERANCE ON ANGLE: ±0.5° ON DECIMALS: INCH MILLIMETER SURFACE(µin.) .XX ±.01 .X ±.5mm 63/ .XXX ±.005 .XX ±.1mm REMOVE ALL BURRS BRAKE CORNERS R.005/.010. INTERPRET DRAWING PER ASME Y14.5-2009 DO NOT SCALE DRAWING DIMENSIONS APPLY AFTER SURFACE FINISH		APPROVALS DATE DRAWN E. NG 4/20/18 CHECK ENGINEER			
THIRD ANGLE PROJECTION 		SIZE CAGE CODE DWG No. REV B 1C2S2 6100252-XX A		TITLE: O&M DWG, 22XX/Y STD ROTOR AND STATOR SET, TABULATED	
		SCALE: NONE CALC. WEIGHT:		SHEET 1 OF 1	