
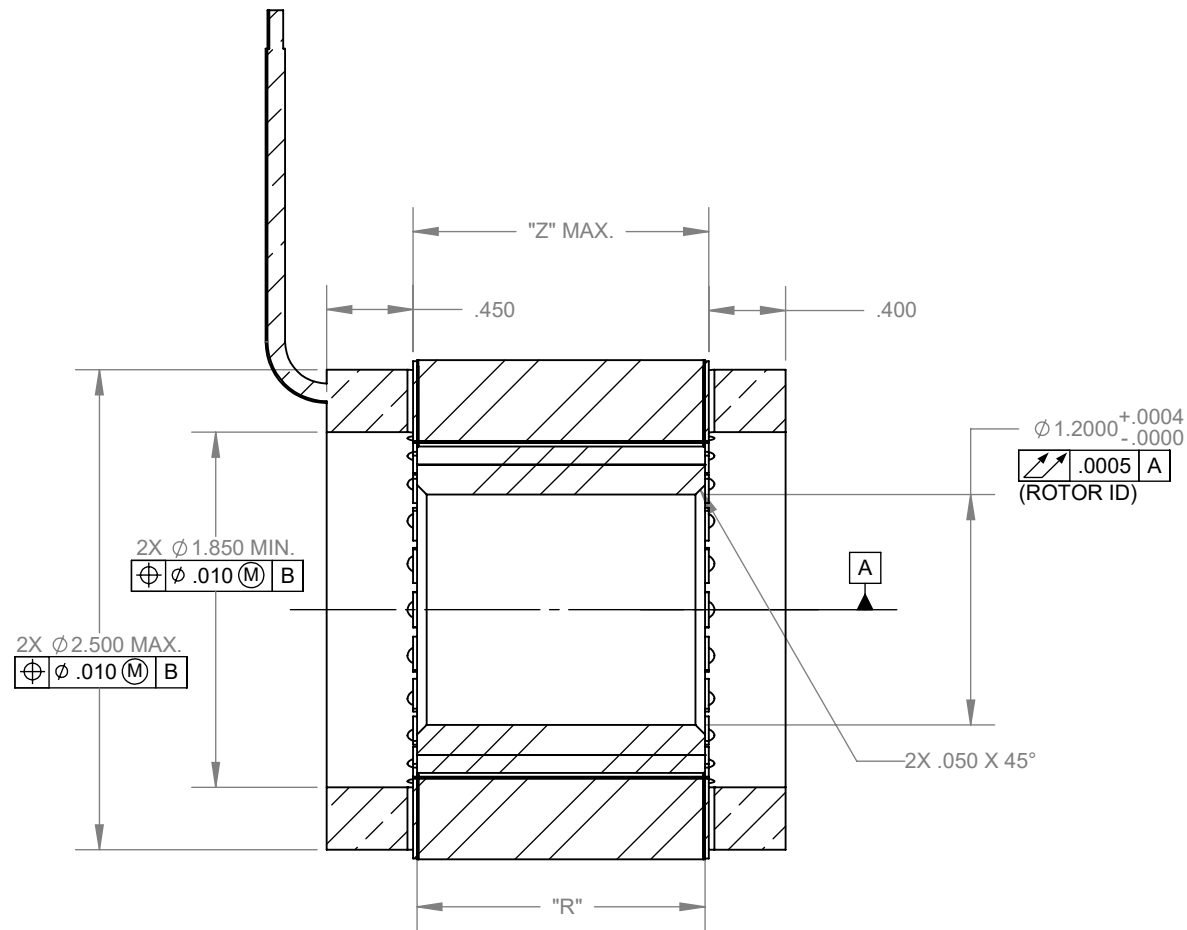


PROPRIETARY STATEMENT: THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO AVEOX, INC. IT MAY NOT BE DUPLICATED IN WHOLE OR IN PART, DISCLOSED TO UNAUTHORIZED PERSONS, OR USED IN THE MANUFACTURE OF PARTS, ASSEMBLIES, OR FOR MANUFACTURING PROCESSES DEFINED HEREIN, WITHOUT PRIOR WRITTEN PERMISSION FROM AVEOX, INC.


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. STATOR LEAD WIRES PER M22759
PHASE A: RED
PHASE B: WHITE
PHASE C: BLACK
2. SEE TABLE BLOW FOR CONFIGURATION

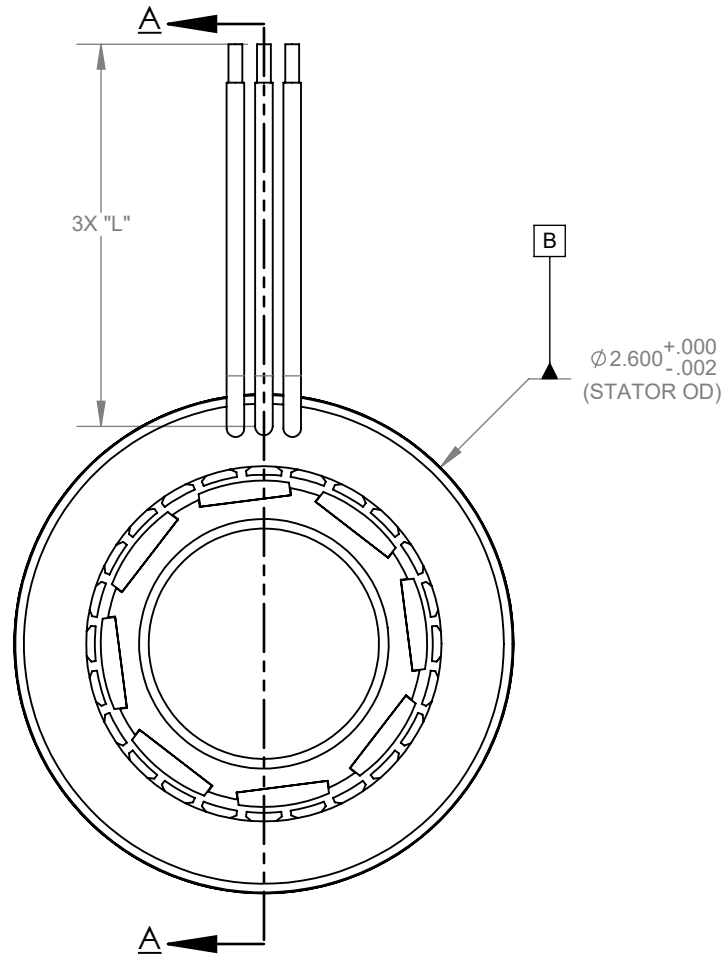

SECTION A-A
SCALE 1 : 1

PART NO.	DESCRIPTION	"Z" MAX.	LEAD WIRE GAGE	"L" ±.500	"R" ± .005
6100249-01	O&M DWG, 2615/14 STD ROTOR AND STATOR SET	1.570	16	12	1.500
6100249-02	O&M DWG, 2615/32 STD ROTOR AND STATOR SET	1.570	16	12	1.500
6100249-03	O&M DWG, 2620/10 STD ROTOR AND STATOR SET	2.070	16	12	2.000
6100249-04	O&M DWG, 2620/25 STD ROTOR AND STATOR SET	2.070	16	12	2.000
6100249-05	O&M DWG, 2630/7 STD ROTOR AND STATOR SET	3.070	16	12	3.000
6100249-06	O&M DWG, 2630/16 STD ROTOR AND STATOR SET	3.070	16	12	3.000

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES			CONTRACT No.		 AVEOX, INC. 2265A Ward Avenue Simi Valley, CA. 93065 805-915-0200 (Phone) 805-915-0201 (FAX)							
TOLERANCE ON ANGLE: ±0.5° ON DECIMALS: INCH MILLIMETER SURFACE(µin.) .XX ±.01 .X ±.5mm 63/ .XXX ±.005 .XX ±.1mm REMOVE ALL BURRS BRAKE CORNERS R.005/.010. INTERPRET DRAWING PER ASME Y14.5-2009 DO NOT SCALE DRAWING DIMENSIONS APPLY AFTER SURFACE FINISH			APPROVALS						DATE			
THIRD ANGLE PROJECTION 			DRAWN E. NG		4/20/18		TITLE: O&M DWG, 26XX/Y STD ROTOR AND STATOR SET, TABULATED					
			CHECK									
			ENGINEER									
					SIZE B		CAGE CODE 1C2S2		DWG No. 6100249-XX		REV A	
					SCALE: NONE				CALC. WEIGHT:		SHEET 1 OF 1	