
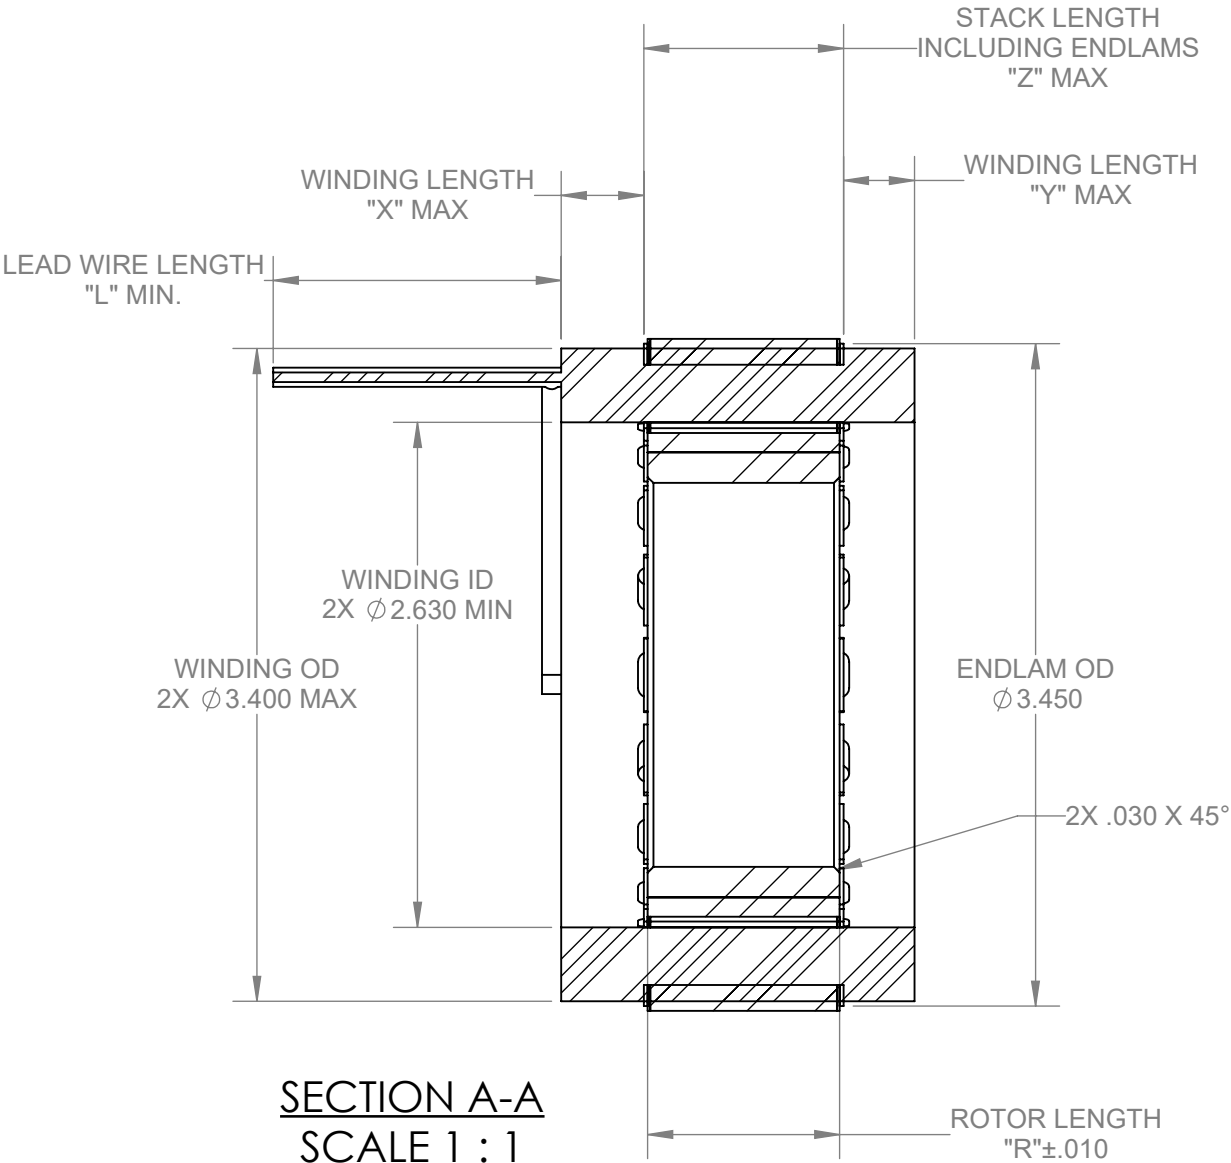


PROPRIETARY STATEMENT: THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO AVEOX, INC. IT MAY NOT BE DUPLICATED IN WHOLE OR IN PART, DISCLOSED TO UNAUTHORIZED PERSONS, OR USED IN THE MANUFACTURE OF PARTS, ASSEMBLIES, OR FOR MANUFACTURING PROCESSES DEFINED HEREIN, WITHOUT PRIOR WRITTEN PERMISSION FROM AVEOX, INC.

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. STATOR LEAD WIRE PER M22759/11
PHASE A: RED
PHASE B: WHITE
PHASE C: BLACK
2. SEE TABLE FOR CONFIGURATION

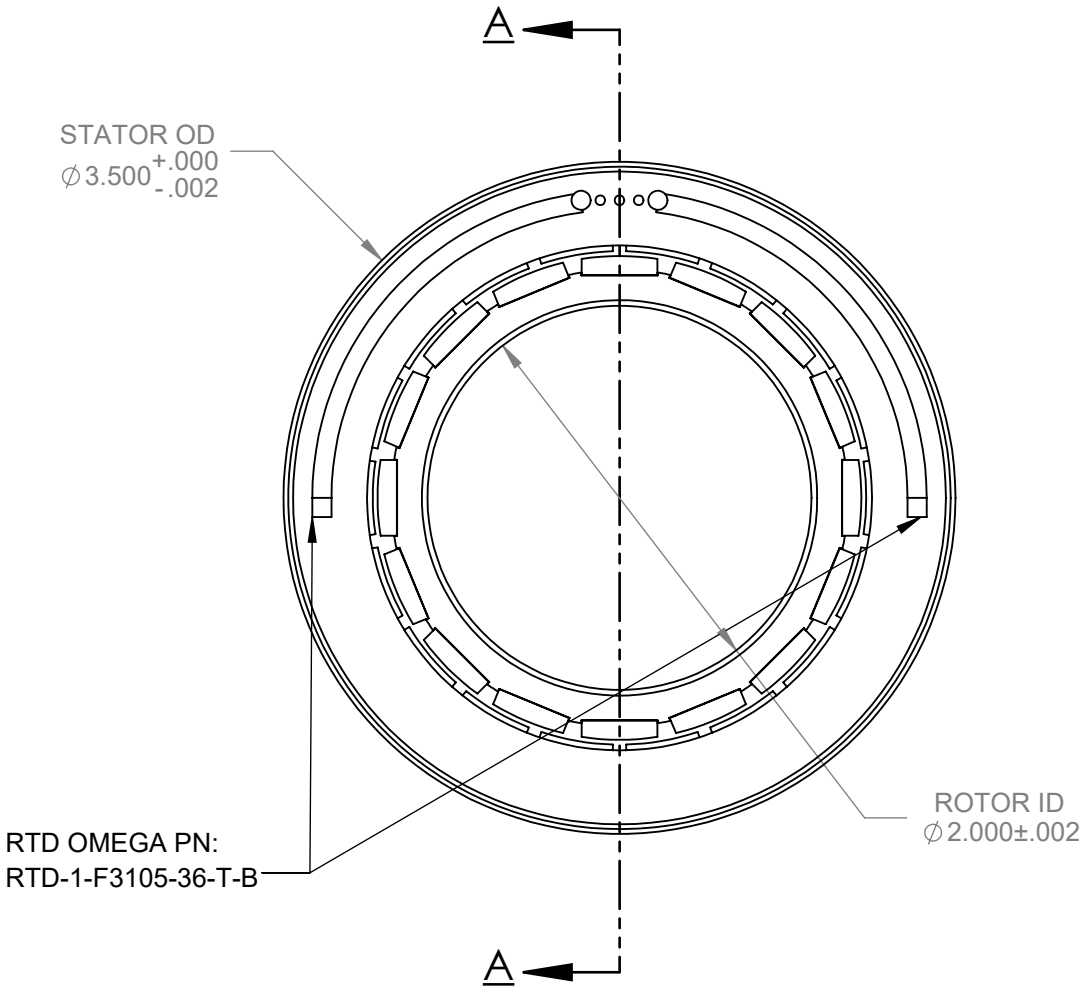


SECTION A-A
SCALE 1 : 1

PART NUMBER	DESCRIPTION	ROTOR LENGTH "R"	LEAD WIRE AWG	LEAD WIRE LENGTH "L"	STACK LENGTH "Z" INCLUDING ENDLAM	ENDTURN HEIGHT, LEAD SIDE "X"	ENDTURN HEIGHT, BOTTOM "Y"
6100378-01	O&M STATOR AND ROTOR SET 3510-16P/11, SENSORLESS	1.000	18	12	1.08	0.53	0.37
6100378-02	O&M STATOR AND ROTOR SET 3515-16P/11, SENSORLESS	1.500	18	12	1.58	0.53	0.37
6100378-03	O&M STATOR AND ROTOR SET 3520-16P/11, SENSORLESS	2.000	18	12	2.08	0.53	0.37
6100378-04	O&M STATOR AND ROTOR SET 3525-16P/11, SENSORLESS	2.500	18	12	2.58	0.53	0.37
6100378-05	O&M STATOR AND ROTOR SET 3530-16P/11, SENSORLESS	3.000	18	12	3.08	0.53	0.37
6100378-06	O&M STATOR AND ROTOR SET 3535-16P/11, SENSORLESS	3.500	18	12	3.58	0.53	0.37

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES

TOLERANCE	ON ANGLE: ±0.5° ON DECIMALS:	
.XX ±.01	.X ±.5mm	SURFACE(μin.)
.XXX ±.005	.XX ±.1mm	63/

REMOVE ALL BURRS
BRAKE CORNERS R.005/.010.
INTERPRET DRAWING PER ASME Y14.5-2009
DO NOT SCALE DRAWING
DIMENSIONS APPLY AFTER SURFACE FINISH



CONTRACT No.	
APPROVALS	DATE
E. NG	6/23/20
CHECK	
ENGINEER	

**AVEOX, INC.**
2265A Ward Avenue Simi Valley, CA. 93065
805-915-0200 (Phone) 805-915-0201 (FAX)

**O&M STATOR AND ROTOR SET
3500/16P, SENSORLESS**

SIZE B	CAGE CODE 1C2S2	DWG No. 6100378-XX	REV A
SCALE: NONE		CALC. WEIGHT:	SHEET 1 OF 1